

Pb Free Plating Product

## ABS210




### 2.0 Ampere Surface Mount Miniature Bridge Rectifier

#### SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Voltage Range - 1000 Volts Current - 1.6/2.0 Ampere

ABS

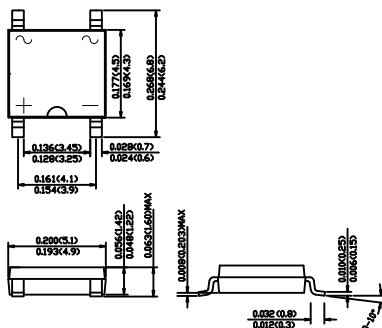

Dimensions in inches and (millimeters)

#### FEATURES

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ High surge current capability
- ◆ Glass passivated chip junction

#### MECHANICAL DATA

**Case:** Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on case

**Mounting Position:** Any

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load derate current by 20%.

|                                                                                                         | SYMBOLS            | ABS210      | UNITS |
|---------------------------------------------------------------------------------------------------------|--------------------|-------------|-------|
| Maximum repetitive peak reverse voltage                                                                 | V <sub>RRM</sub>   | 1000        | VOLTS |
| Maximum RMS voltage                                                                                     | V <sub>RMS</sub>   | 700         | VOLTS |
| Maximum DC blocking voltage                                                                             | V <sub>DC</sub>    | 1000        | VOLTS |
| Maximum average forward rectified current                                                               |                    |             |       |
| On glass-epoxy P.C.B.(Note1)                                                                            | I <sub>F(AV)</sub> | 1.6         | Amps  |
| On aluminum substrate(Note2)                                                                            |                    | 2.0         |       |
| Peak forward surge current,<br>8.3ms single half sine-wave superimposed on<br>rated load (JEDEC Method) | I <sub>FSM</sub>   | 60          | Amps  |
| Maximum instantaneous forward voltage drop<br>per leg at 0.8A                                           | V <sub>F</sub>     | 0.95        | Volts |
| Maximum DC reverse current                                                                              |                    |             |       |
| at rated DC blocking voltage T <sub>A</sub> =25°C                                                       | I <sub>R</sub>     | 5           | uA    |
| T <sub>A</sub> =100°C                                                                                   |                    | 100         | uA    |
| Operating temperature range                                                                             | T <sub>J</sub>     | -55 to +150 | °C    |
| storage temperature range                                                                               | T <sub>STG</sub>   | -55 to +150 | °C    |

NOTES:1.On glass epoxy P.C.B. mounted on 0.05x0.05"(1.3x1.3mm) pads

2.On aluminum substrate P.C.B. with on area of 0.8"x0.8"(20x20mm) mounted on 0.05X0.05"(1.3X1.3mm) solder pad

## RATINGS AND CHARACTERISTIC CURVES ABS210

FIG.1 TYPICAL FORWARD CHARACTERISTICS

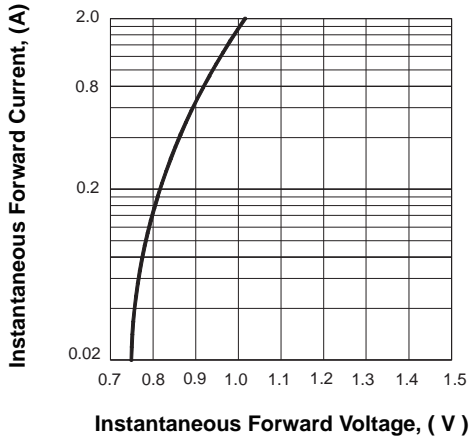


FIG.2 FORWARD DERATING CURVE

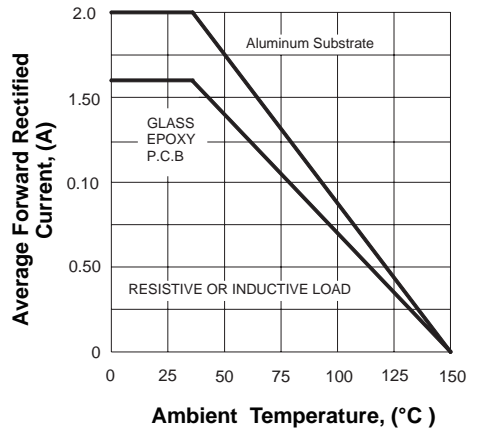


FIG.3 TYPICAL REVERSE CHARACTERISTICS

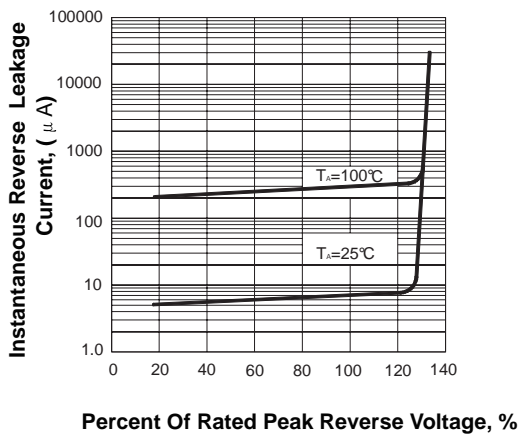


FIG.4 PEAK FORWARD SURGE CURRENT

